

The logo for AIRGREEN features a stylized human figure in yellow and grey, with arms raised, positioned above the word "AIRGREEN". The text "AIRGREEN" is rendered in a bold, sans-serif font with a white outline and a grey fill. The entire logo is set against a background of vibrant green grass with a bokeh effect of sunlight in the upper left corner.

AIRGREEN





серия **HG2** (ON/OFF)




Высокий класс энергоэффективности - A



Антикоррозийное покрытие Blue Fin



Самодиагностика

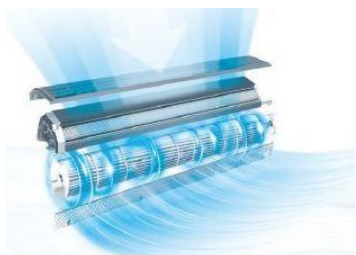

Турбо-режим при работе на охлаждение и обогрев



Функция «комфортный сон»



Модель	07HG2-GRI/GRO	09HG2-GRI/GRO	12HG2-GRI/GRO	18HG2-GRI/GRO	24HG2-GRI/GRO
Площадь помещения, м2	до 22	до 25	до 32	до 46	до 61
Производительность холод, кВт	2,25	2,64	3,22	4,7	6,15
Производительность тепло, кВт	2,3	2,82	3,51	4,9	6,5
Потребляемая мощность холод, Вт	700	822	1004	1460	1900
Потребляемая мощность тепло, Вт	637	781	973	1430	1900
Номинальный ток холод, А	3,1	3,65	5	7,3	8,43
Номинальный ток тепло, А	2,92	3,46	4,5	6,9	8,43
Класс энергоэффективности	A	A	A	A	A
Расход воздуха max, м3/ч	400	450	650	850	850
Звуковое давление max, Дб(А)	37	38	42	49	45
Размеры внутреннего блока (ШxГxВ), мм	730x254x170	730x265x174	845x275x180	940x298x200	940x298x200
Размеры наружного блока (ШxГxВ), мм	720x428x310	720x428x310	776x540x320	848x540x320	913x680x378
Вес внутреннего/наружного блока, кг	8/22,5	авг.26	сен.29	13/40	13/46
Диаметр трубопроводов жидк/газ, дюйм	1/4 / 3/8	1/4 / 3/8	1/4 / 1/2	1/4 / 1/2	1/4 / 1/2
Межблочный кабель, жил/мм	5/1,5	5/1,5	5/2,5	5/2,5	5/3,0
Диапазон рабочих температур, гр.С	18~43 / -10~24	18~43 / -7~24	18~43 / -7~24	18~43 / -7~24	18~43 / -7~24